

Single triangular tower

Rfmt101



Serial number	Rfmt101
Product line	Robinia Multiplay
Dimensions	210 * 135 cm
Height	≈ 180 cm
FFH	85 cm
In accordance with norm EN	EN1176:17
Age group	3 +
Key user group	3 – 8 years
Inclusive	No
Number of users	4

Warranty

- 10

10-year guarantee - Coverage includes structural failure of the robinia components and structures.
- 5

5-year guarantee - Structural strength of steel and stainless steel components
- 2

2-year guarantee - Structural failure of high density polyethylene and plastic components

Check the warranty card for more information

Torosplay Ltd.
Bulgaria
8000, Burgas
55 "Kraina" Street
South Industrial Zone

Activities





The Robinia wood can be supplied as untreated raw wood, painted with a brown coloured transparent pigment that maintains the golden wood colour or in a coloured version where selected components are painted in different colours.



Inclined robinia ramp with 5 holding grips attached to each board

Torosplay Ltd.



Bulgaria
8000, Burgas
55 "Kraina" Street
South Industrial Zone




Rope handles attached to a specific stainless steel hardware.



GRP slide with HDPE side panels. Suitable for places with direct sunlight.

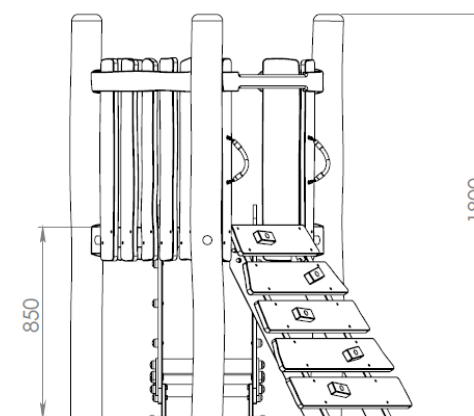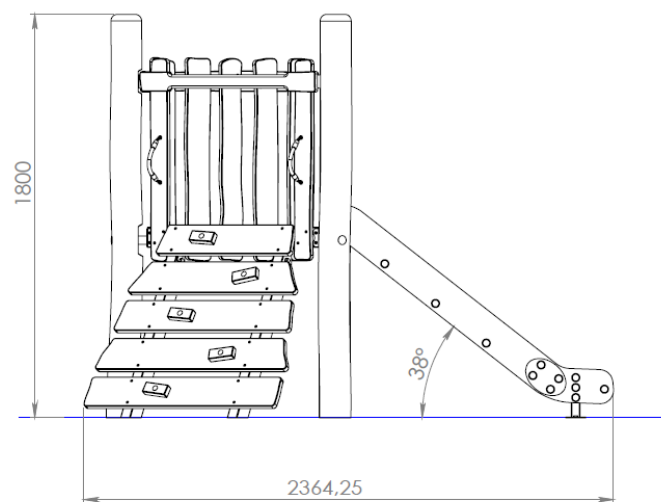


Cargo details

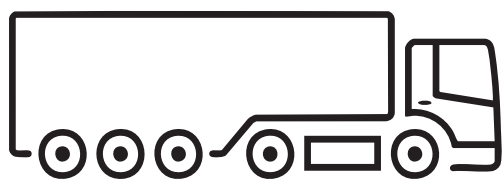

On a single pallet: 140*250*120 cm / 280 kgs.

Torosplay Ltd.
Bulgaria
8000, Burgas
55 "Kraina" Street
South Industrial Zone

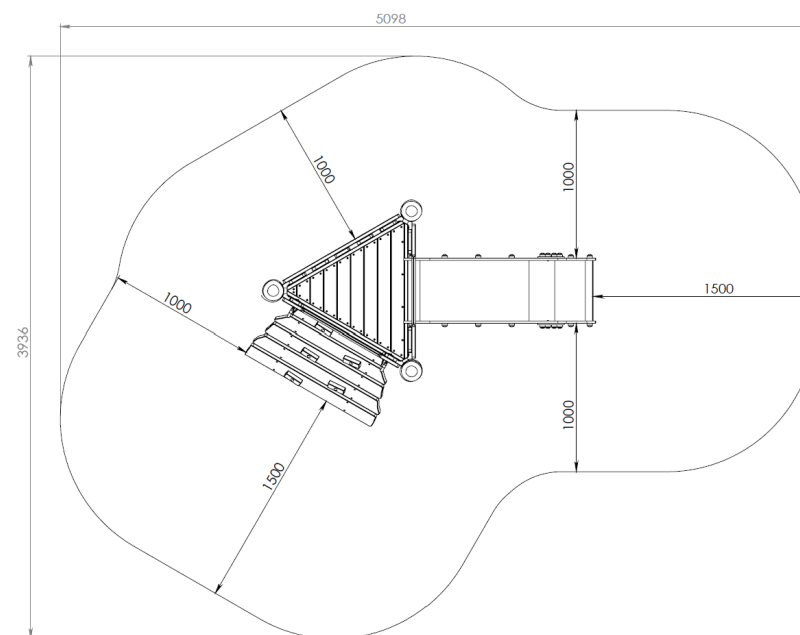



The hardware is made of stainless steel or galvanized steel to ensure durable connections with a high corrosion resistance. This robust construction guarantees long-lasting performance even in harsh environments.



Design your own:
Wide color pallet to choose colors from
We use only certified EN71 chemical free paints



Robinia boards – 9/14 * 2,5.
Sanded, chamfered R=5mm,
Quality – A,B



Robinia poles 14 – 22 cm in diameter, best possible quality, sanded



16 and 18 mm
PP-Multifilament & split film
Or Braided nylon
Steel core – highest quality



Rope color options



Solid T and X connector ensure the
Durability of the nets we produce



Torosplay Ltd.
Bulgaria
8000, Burgas
55 "Kraina" Street
South Industrial Zone


TOROSPLAY

Surfaces according to EN 1176-1:2017


TOROSPLAY

Nº	Material	Description	min. layer thickness mm	max. fall height mm
1.	concrete			≤ 600
2.	asphalt			≤ 600
3.	topsoil			≤ 1000
4.	turf			≤ 1500
5.	bark	20 - 80 mm grain size broken bark of conifers	200	≤ 2000
			300	≤ 3000
6.	wood chips	5 - 30 mm grain size mechanically broken wood, without bark and leaf components	200	≤ 2000
			300	≤ 3000
7.	sand		200	≤ 2000
			300	≤ 3000
8.	gravel		200	≤ 2000
			300	≤ 3000
9.	other		according to producer	≤ 3000

Installation method Type A: ≈ 1,3 m³ concrete into the ground

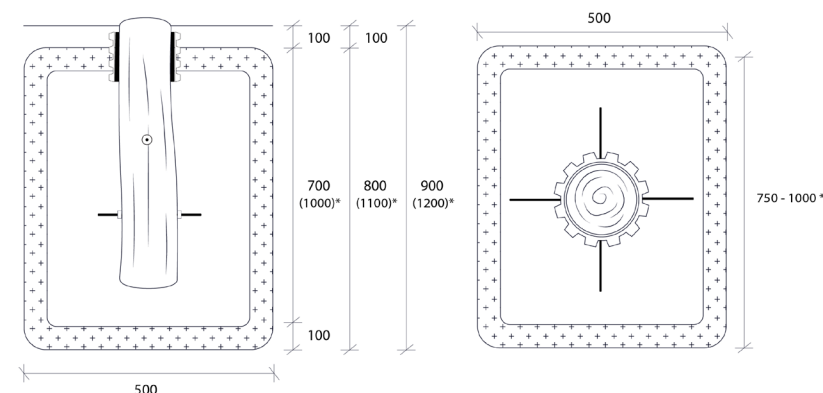

Installation method Type B: Anchoring

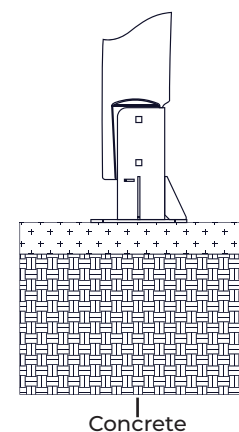

Torosplay Ltd.
Bulgaria
8000, Burgas
55 "Kraina" Street
South Industrial Zone